



THIN-CRETE

Stamped Overlay System



- WIDE ARRAY OF TEXTURES & PATTERNS
- COMPRESSIVE STRENGTH 6000 PSI
- EASY TO MAINTAIN
- EXTERIOR OR INTERIOR APPLICATIONS
- ELIMINATES COSTLY CONCRETE REPLACEMENT
- RESIDENTIAL & COMMERCIAL



EUCLID CHEMICAL
CAVE



THIN-CRETE

Transform Plain Concrete

Where concrete overlays and the beauty of nature combine

Thin-Crete overlays duplicate the grandeur of nature at a fraction of the cost without the mess or expense of removing structurally-sound concrete. With an array of patterns and hundreds of color combinations, the creative possibilities are limitless. Imagine a thin overlay that is durable, wear-resistant and low maintenance, and because there is no heaving, shifting or settling, Thin-Crete is a superior alternative to pavers. Thin-Crete adds value to both interior and exterior spaces and is perfect for residential and commercial driveways, sidewalks, entries, patios/lanais, pool decks and much more.



■ **Thin-Crete** re-creates the beautiful look of nature with an easy-to-apply, cost-effective, durable overlay. Enhance existing concrete surfaces with the stunning look of natural stone, slate, granite, brick and even wood, in realistic deep-relief patterns. Thin, at less than 3/8" thick, yet tough, Thin-Crete is perfect anywhere concrete is an option.



Ideal for: Driveways | Entrances | Walkways | Plazas | Decking | Landscaping

AN ENGINEERED SYSTEMS APPROACH

PRODUCT	DESCRIPTION	QUANTITY	COVERAGE
GREASE-A-WAY	Concentrated cleaner and degreaser designed to dissolve dirt, grease and oil stains from concrete and masonry surfaces.	1 gal (3.8 L)	1,500 ft ² (139 m ²)
		5 gal (18.9 L)	7,500 ft ² (697 m ²)
BOND-CRETE	A high-solids bonding agent for cementitious overlays that increases bond strength and durability.	1 gal (3.8 L)	150-250 ft ² (14-23 m ²)
		5 gal (18.9 L)	350-1,250 ft ² (32-116 m ²)
THIN-CRETE GROUT & COLOR PACK	Stamping grout designed to cover existing concrete. Mix with water and pre-measured color of your choice. Available in 30 standard colors.	50 lbs (22.7 kg)	1/8"-50 ft ² (4.6 m ² @ 3 mm)
			1/4"-25 ft ² (2 m ² @ 6 mm)
			3/8"-15 ft ² (1.4 m ² @ 9 mm)
INCRETE DELAY/TROWEL GLIDE	Surface retardant for stamped concrete that prevents rapid-moisture loss from surface.	1 gal (3.8 L)	1,000-2,000 ft ² (93-186 m ²)
		5 gal (18.9 L)	5,000-10,000 ft ² (464-929 m ²)
LIQUID RELEASE	A clear, liquid, release agent that easily frees stamping tools from grout overlays.	1 gal (3.8 L)	200 ft ² (18 m ²)
		5 gal (18.9 L)	1,000 ft ² (93 m ²)
ANTIQUING- AGENT	Secondary colorant for stamped concrete that tints grout lines and impressions without affecting the base color.	5 lb (2.2 kg)	5,000 ft ² (464 m ²)
CLEAR SEAL	A clear, non-yellowing formula that will protect the surface while deepening and highlighting the color of concrete.	1 gal (3.8 L)	200-400 ft ² (18-37 m ²)
		5 gal (18.9 L)	1,000-2,000 ft ² (93-186 m ²)
SHUR-GRIP	A colorless, finely-graded, non-slip additive for sealers	1 lb (0.45 kg)	1,000 ft ² (93 m ²)
		15 lb (6.8 kg)	15,000 ft ² (1,393 m ²)


PATTERN VARIETIES

Unique custom looks that turn any property into a showplace. With over 100 stamping patterns available, visit our website for a complete listing.

www.increte.com

COLOR COMBINATIONS

30 standard colors result in hundreds of possible shade combinations. This printed color chart is for reference purposes only. Euclid Chemical recommends choosing colors from actual test samples.

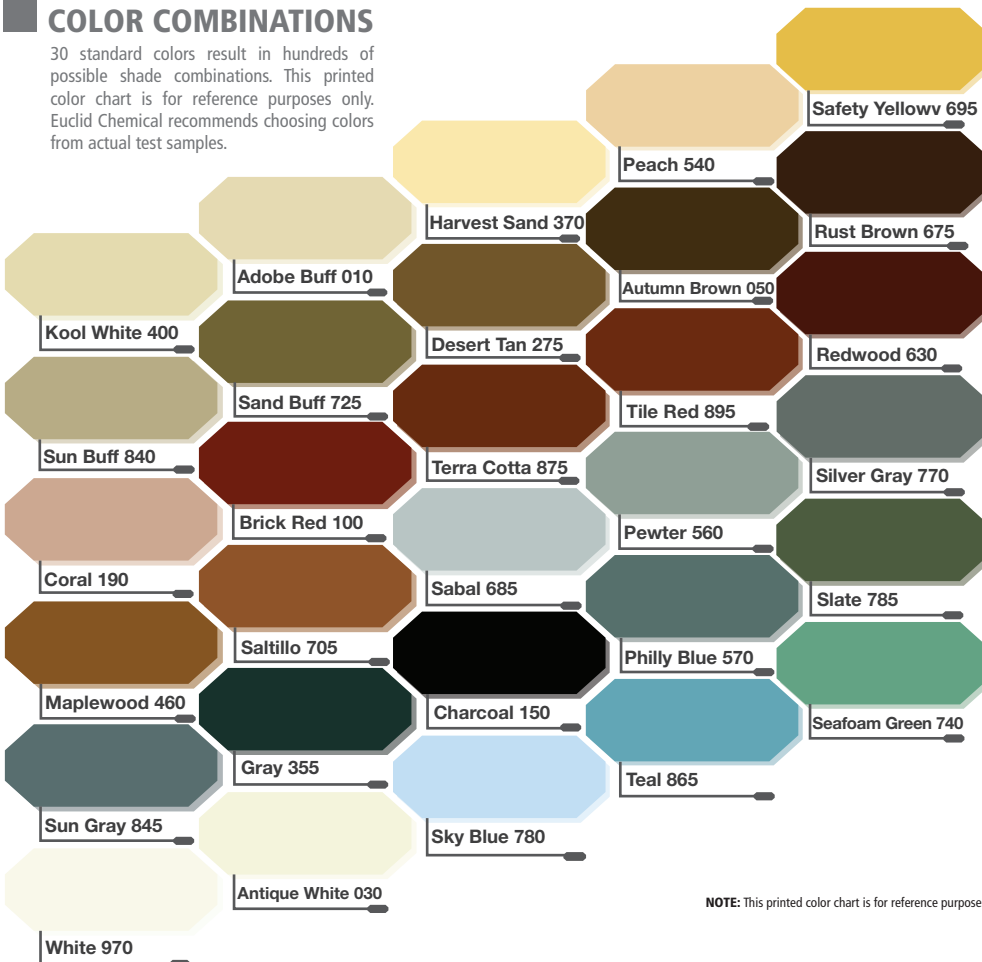

NOTE: This printed color chart is for reference purposes.



EUCLID CHEMICAL

1611 Gunn Highway
Odessa, FL 33556
t 1-800-752-4626
f 1-813-920-1516

www.increte.com

BD07 Thin-Crete © 2015 The Euclid Chemical Company. This material is provided for informational purposes only. The Euclid Chemical Company expressly disclaims any liability relating to the use of this material. Nothing stated herein shall give rise to or constitute any warranty by The Euclid Chemical Company, express or implied, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. The information provided in this material is not intended to be all inclusive, as the manner in which any product is used or handled may involve other or additional considerations that are not addressed herein.